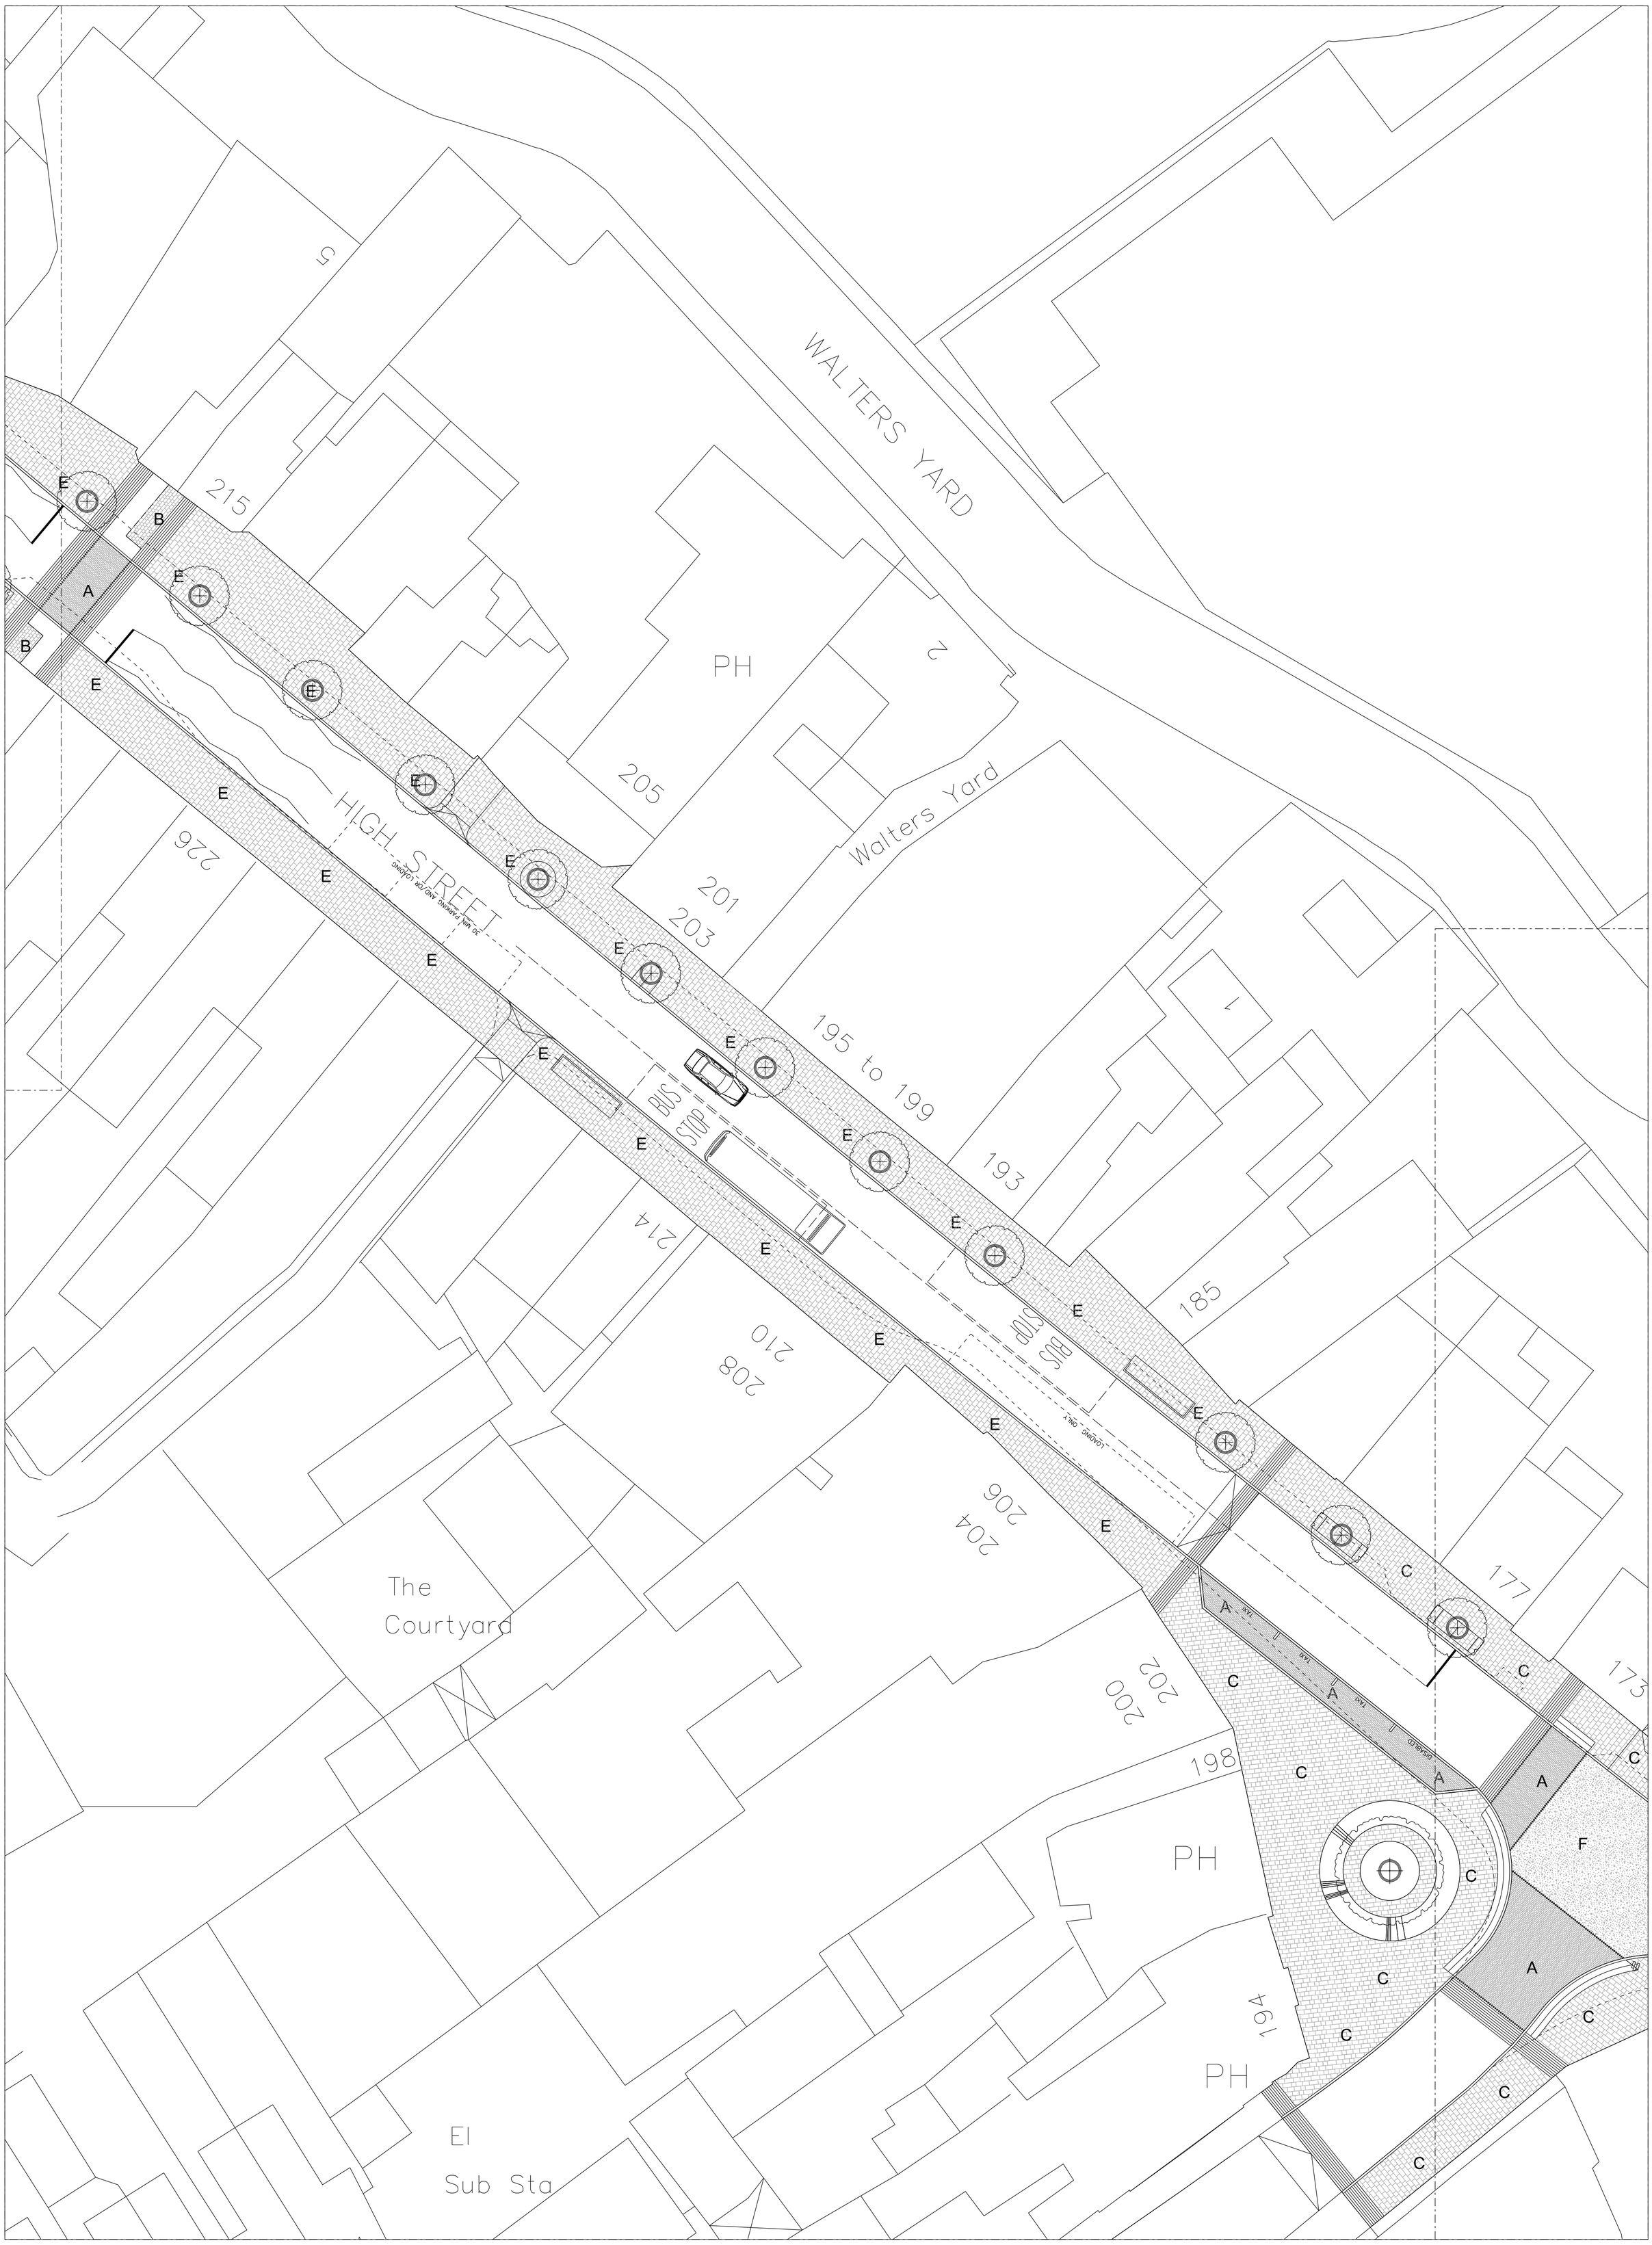

LEGEND

HARD PAVING

- (A) 100 GAUGE "YELLOW ROCK": Random Course 100x150mm & 150x150mm & 100x200mm Units 100% "Yellow Rock" Granite G682 Bush Hammered Finish
- (B) 200 GAUGE "YELLOW ROCK": Random Course 200x200mm, 200x300mm & 200x400mm Units Bush "Yellow Rock" Granite G682 Bush Hammered Finish
- (C) 300 GAUGE "YELLOW ROCK": Random Course 300x300mm, 300x450mm & 300x600mm Units 100% "Yellow Rock" Granite G682 Bush Hammered Finish
- (F) 100 GAUGE "80/20": Random Course 100x150mm & 150x150mm & 100x200mm Units 80% "York Buff" Yorkstone, Sawn Finish (Transition gradation feathering from Facade to Kerb) 20% "Yellow Rock" Granite G682, Bush Hammered Finish
- (G) 300 GAUGE "80/20": Random Course 300x300mm, 300x450mm & 300x600mm Units 80% "York Buff" Yorkstone, Sawn Finish (Transition gradation feathering from Facade to Kerb) 20% "Yellow Rock" Granite G682, Bush Hammered Finish
- (F) COLOURED TARMAC: Brown colouring Spec TBC

KERBS

- (M) KERBS: 60mm high (Except on East St - Flush) 150x255mm CEO "Crystal Black" Granite
- (N) FLUSH FLAGS: 150x600mm Flags "Crystal Black" Granite

Keyplan

No implied licence exists. This drawing should not be used to calculate areas for the purposes of valuation. Do not scale this drawing. All dimensions to be checked on site by the contractor and such dimensions to be their responsibility. All work must comply with relevant British Standards and Building Regulations requirements. Drawing errors and omissions to be reported to the architect.

Revisions

Rev	Date	Description	By	Chk
03	13.02.12	Materials Update	TS	
02	21.09.11	Materials Update	TS	SEW
01	14.09.11	Draft Update	TS	SEW
00	24.08.11	Draft	TS	SEW

Project	Drawing
Bromley North Village	General Arrangement (2 of 5)

Project Number	Status	Drawing No.	Rev
0137	Draft	0161	03

Scale at A1 (A3)	Date	Drawn by	Checked by
1:200	24.08.11	TS	SEW

Scale Bar

0 10m

N

sew
No.1 Compton Court
40 Compton St
London EC1V 0AP
0207 549 1730
hello@egretwest.com
egretwest.com
© 2007 SEW ltd

Client

Bromley
THE LONDON BOROUGH